




DYA LIGHTING LIMITED

2018

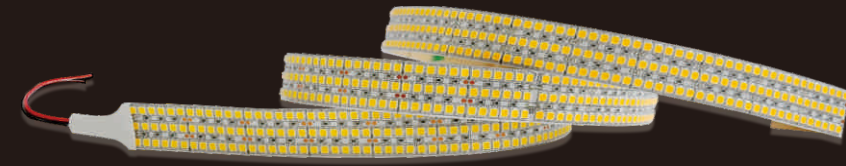

www.dyalighting.com

FULL BEAM SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
K120208	8	50	24	120	20	1700	85
BH180212	12	100	24	180	18	1350	75

GROW LIGHT SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
B60210-R	10	100	24	60	12	/	/
B60210-B	10	100	24	60	12	/	/
B60210-RW	10	100	24	60	12	/	/
B60210-RB	10	100	24	60	12	/	/
B60210-P	10	100	24	60	12	/	/
B60210-P	10	50	24	120	20	/	/

DOUBLE LINE SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
D240215	15	50	24	240	19.2	1440	75
B240214	15	50	24	240	24	2040	85
B280220	20	50	24	280	28	2380	85
B120220	20	50	24	120	24	1920	80

TRIPLE LINE SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
B420230	30	50	24	420	40	4800	120
B792222	22	22.7	24	792	52	5200	100

ADHESIVE TAPE

	Adhesive Thickness mils (mm)	Adhesion to Stainless Steel
3M 200MP	5.2mils (0.13 mm)	7.0N/CM
3M 300MP	4.8mils (0.12 mm)	8.6N/CM
3M 9080 Tape	12.8mils (0.32 mm)	7.5N/CM
3M 4229 Tape	30.4mils (0.76 mm)	20.0N/CM
Tesa 4965	8.2mils (0.205 mm)	14.0N/CM
Blue Tape	4.0mils (0.10mm)	6.0N/CM



IP RATING

IP54-PU	PU Glue On The Surface
IP54-SI	Silicone Glue On The Surface
IP54-SP	Spray Silicone Glue On The Surface
IP54-ST	Silicone Tube On The Surface
IP65-ST	Silicone Tube On Both Sides
IP65-HT	HeatShrink Tube On Both Sides
IP65-Nano	Nano Coating
IP67-HI	Hollow Integrated Silicone Glue
IP68-SI	Solid Integrated Silicone Glue


LED ALUMINUM PROFILE



ACCESSORIES



PRODUCT NAME EXPLANATION

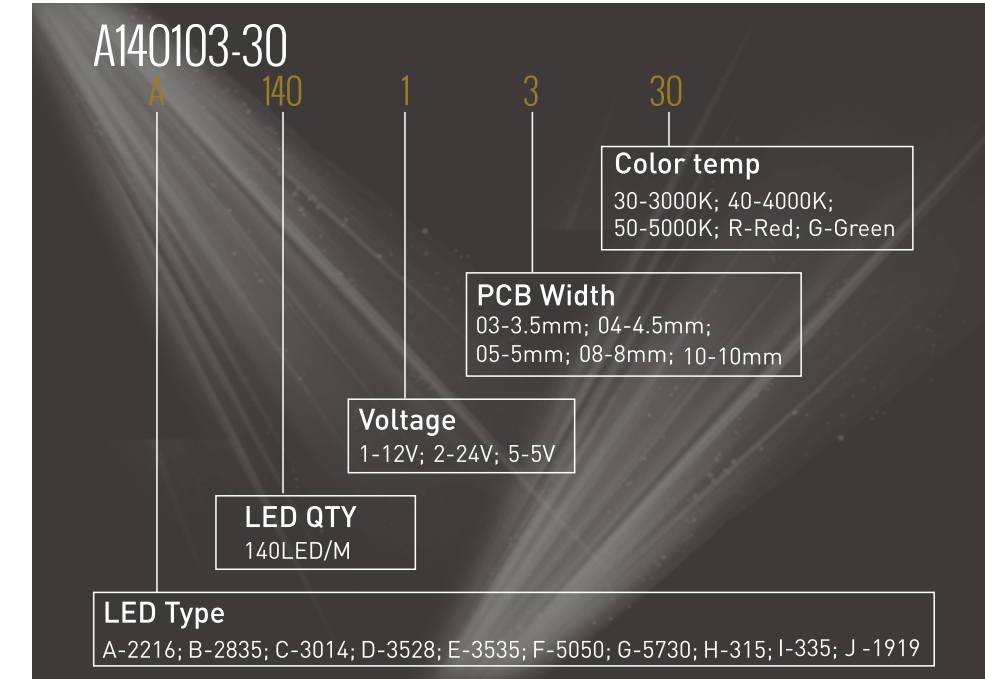

A: Area B MinTai Industry area 1 GuanTang MeiTang HuangJiang
Town Dongguan, China 523000

T: +86 (0) 755 2376 5009

E: +86 (0) 755 2763 3748

E: manager@dyalighting.com

W: www.dyalighting.com

https://www.facebook.com/dyaledlighting/

https://www.linkedin.com/organization/16198860/admin/updates/

2216 SERIES STRIP LIGHT

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
A280210	10	25	24	280	20	1740	87
A280210D	10	50	24	280	20	1740	87

2835 SERIES STRIP LIGHT

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
B30108	8	100	12	30	7	630	90
B48108	8	62.5	12	48	11	990	90
B60208	8	100	24	60	13	1170	90

B60108-G	8	50	12	60	13	/	/
B60208	8	100	24	60	13	1170	90

B78108	8	38.5	12	78	16.8	1512	90
B78208	8	77	24	78	16.8	1512	90
B84110	10	35.7	12	84	18	1620	90

B96210	10	62.5	24	96	20	1800	90
B120210	10	50	24	120	22	1980	90
B120212	12	50	24	120	22	1980	90

B224212	12	31.2	24	224	24	2070	90
B240212	12	25	24	240	26	2340	90

3528 SINGLE COLOR SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
D60108	8	50	12	60	4.2	294	70
D60108-R	8	50	12	60	4.2	/	/
D60108	8	50	12	60	4.2	294	70
D60208	8	100	24	60	4.2	294	70

3528 SINGLE COLOR SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
D78108	8	38.4	12	78	6.2	434	70
D78208	8	76.9	24	78	6.2	434	70
D120108	8	25	12	120	9.6	672	70

D120208	8	50	24	120	9.6	672	70
D240210	10	25	24	240	19.2	1344	70
D240212	12	25	24	240	19.2	1344	70

Color Options: ■ Red ■ Green ■ Blue ■ UV

315/335 SIDE VIEW SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
H140210	10	50	24	140	9.6	576	60
H140210-CCT	10	100	24	140	9.6	576	60
I60108	8	50	12	60	4.8	240	50

I120108	8	25	12	120	9.6	480	50
---------	---	----	----	-----	-----	-----	----

5050 SINGLE COLOR SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
F30110	10	100	12	30	7	546	78
F48110	10	62.5	12	48	11	858	78
F60210	10	100	24	48	11	858	78

F60110	10	50	12	60	14	1092	78
F60110	10	50	12	60	14	1092	78
F60110	10	50	12	72	17	1326	78
F96213-30	13.5	62.5	24	96	23	1794	78

Color Options: ■ Red ■ Green ■ Blue ■ UV

5730 SINGLE COLOR SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
G36110	10	166.6	12	30	10	930	93
G60210	10	50	24	60	16	1488	93
G60110	10	100	12	60	16	1488	93

G60212	12	100	24	60	20	1860	93
G72212	12	83.3	24	72	24	2232	93

Color Options: ■ Red ■ Green ■ Blue ■ UV

CRI 95+ SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
B60210-21	10	100	24	60	12	840	70
B60210-25	10	100	24	60	12	852	71
B60210-30	10	100	24	60	12	864	72

B60210-35	10	100	24	60	12	876	73
B60210-40	10	100	24	60	12	888	74
B60210-62	10	100	24	60	12	900	75



F60210-21	10	100	24	60	14	1022	73
F60210-25	10	100	24	60	14	1036	74
F60210-30	10	100	24	60	14	1050	75

F60210-35	10	100	24	60	14	1064	76
F60210-40	10	100	24	60	14	1078	77
F60210-62	10	100	24	60	14	1092	78

RGB FULL COLOR SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
E30110-RGB	10	100	12	30	7.2	/	/
E60110-RGB	10	50	12	60	12	/	/
E60210-RGB	10	100	24	60	12	/	/

E120210-RGB	10	50	24	120	24	/	/
F30110-RGB	10	100	12	30	7	/	/
F60110-RGB	10	50	12	60	14	/	/

F96213-RGB	13.5	62.5	24	96	23	/	/
F120220-RGB	20	50	24	120	28	/	/

RGBW ADJUSTABLE SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
F60112-RGB30-4in1	12	50	12	60	14.4	/	/
F60112-RGB40-4in1	12	50	12	60	14.4	/	/
F60112-RGB30	12	100	12	60	14.4	/	/

F60112-RGB40	12	100	12	60	14.4	/	/
F60112-RGB60	12	100	12	60	14.4	/	/
F96213-RGB30	13.5	125	24	96	23	/	/

CF180215-RGB CCT	15	100	24	180	27	/	/
------------------	----	-----	----	-----	----	---	---

DUAL WHITE COLOR SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
F60110-CCT-2in1	10	50	12	60	14.4	1080	75
J60108-CCT-2in1	8	50	12	60	12	960	80
J120210-CCT-2in1	10	50	24	120	20	1600	80
D120110-CCT	10	50	12	120	9.6	672	70

DUAL WHITE COLOR SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
B120110-CCT	10	50	12	120	24	2160	90
F96213-CCT	13.5	125	24	96	23	1725	75

ULTRA SLIM SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
A140203-30	3.5	50	24	140	10	800	80
A140203-40	3.5	50	24	140	10	820	82
A140203-60	3.5	50	24	140	10	850	85

B78103	3.5	38.4	12	78	8	600	75
B60104	4.5	50	12	60	5	375	75
B120205	5	50	24	120	9.6	720	75

B168205	5	41.6	24	168	18	1350	75
G70205-CC	5	100	24	70	15	1800	120

BENDABLE S TYPE SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
B60106-S	6	50	12	60	6	360	60
B60108-S	8	50	12	60	8	520	65
B60106-S IP54	6	50	12	60	6	360	60

GREAT WALL SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
B120206-G	6	50	24	120	10	800	80

CONSTANT CURRENT SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
B30210-CC	10	200	24	30	6	540	90

CONSTANT CURRENT SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
B60210-CC	10	100	24	60	12	1080	90
B70210-CC	10	100	24	70	14	1260	90
B120210-CC	10	50	24	120	22	1980	90

B140210-CC	10	50	24	140	26	2340	90
F40210-CC	10	50	24	40	9	720	80
F60210-CC	10	100	24	60	14	1190	85

G70205-CC	5	100	24	70	15	1425	95
G126212-CC	12	55.5	24	126	26	2470	95

5V USB SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
B60508	60	5	8	10	6	420	70
B60508-R	60	5	8	10	6	/	/
F30510-RGB	30	5	10	33.3	7	/	/

ONE LED CUT SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
B100110-30	10	10	12	100	22	1936	88
B100110-40	10	10	12	100	22	1958	89
B100110-50	10	10	12	100	22	1980	90

TWO LEDS CUT SERIES

	W(mm)	Segment	Voltage	QTY/M	W/M	Lm/M	Lm/W
F40210	10	50	24	40	8	640	80
F40110-CCT	10	50	12	40	8	640	80
F72210	10	27.7	24	72	17	1360	80